Technical Manual

RS-Video

Studio Monitor Series 2-Way

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 8 ohm
- Power Rating: 20-150 watts RMS into 8 Ohms
- Sensitivity: 89 dB @2.8V, 1 meter
- Crossover Frequencie: 2200Hz
- Frequency Response: 100Hz-20KHz +/-3dB

PRODUCTION HISTORY

- Introduced in 1993
- Discontinued 1995
- Original Retail Price: $299.00/each

PHYSICAL SPECIFICATIONS:

- 1x - 1" (12.5mm) Ferrofluid Cooled Polycarbonate Tweeter
- 2x - 5-1/4" (133mm) IMG Woofer (Magnetically shielded)
- Dimensions: 7"H x 18-3/4"W" x 6-1/4"D (with grille)
  178mm(H) x 476mm(W) x 159mm(D)
- Cabinet Not Sold
- Grille/with logo #026-6374
- Crossover #A015-6392
- Push Terminals Not Sold

TECHNICAL INFORMATION



1" TWEETER
#902-6412

NO DIAPHRAGM

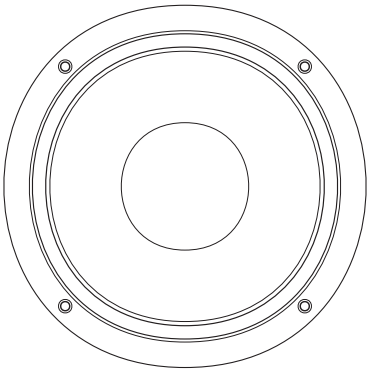

(2x) 5-1/4" IMG WOOFERS
(Magnetically shielded)
#902-6416

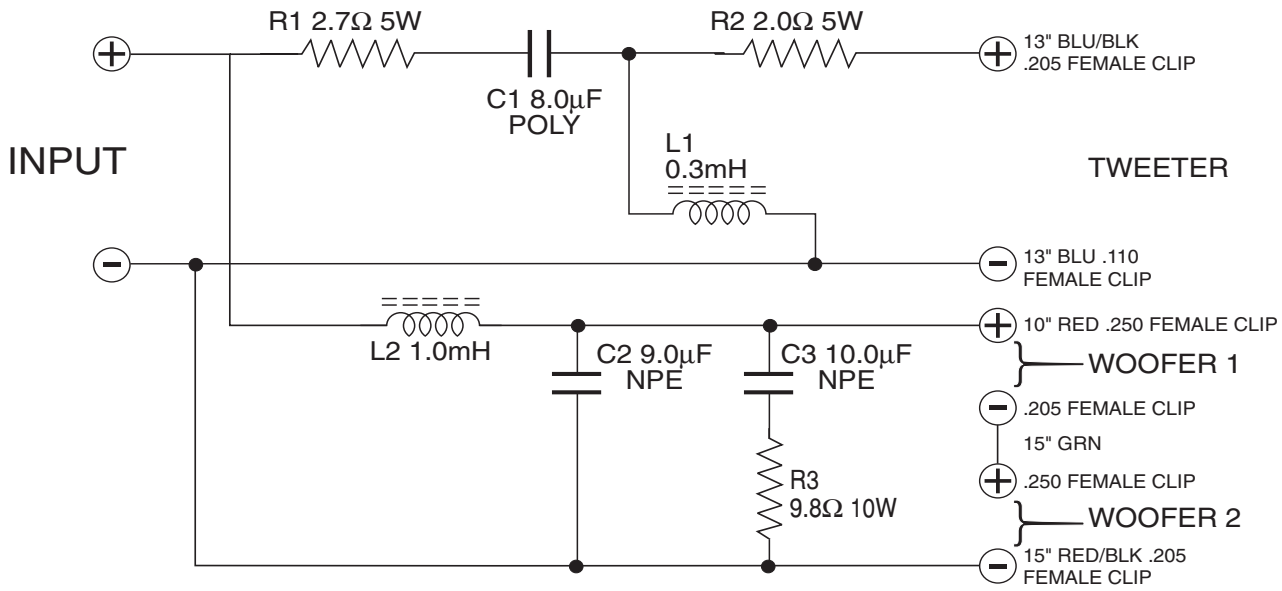

RS-Video Studio Monitor Series 2-Way

INFINITY SYSTEMS INC., 250 Crossways Park Drive, Woodbury, New York 11797